


GRUPPO: - MOTOR:

“ C 50 ” (12V) - (24V)



SPECIFICHE TECNICHE	TECHNICAL DATA	C 50 (12V) - (24V)			
Voltaggio	Voltage	Volt/Hz		12DC	24 DC
Potenza / Assorb.	Power / Absorption	Watt - Amp.		180 - 20	180 - 10
Pressione	Pressure	Bar - P.s.i.		10 - 145	10 - 145
Aria aspirata	Inlet flow rate	L/min - C.f.m.		48.7 - 1.7	52,5 - 1,83
Aria resa (5 Bar)	Outlet flow rate (5 Bar)	L/min - C.f.m.		18 - 0.6	23 - 0.8
Rumore	Noise level	dB (A)		60 - 70	
Dimensioni	Dimensions	mm - inch	-	190x110x180 7.48x4.33x7.08	
Peso	Weight	Kg - Lbs		2.7 - 5.94	
Classe di servizio intermittente		-	-	S3	
Classe di protezione:		-	-	IP 45	

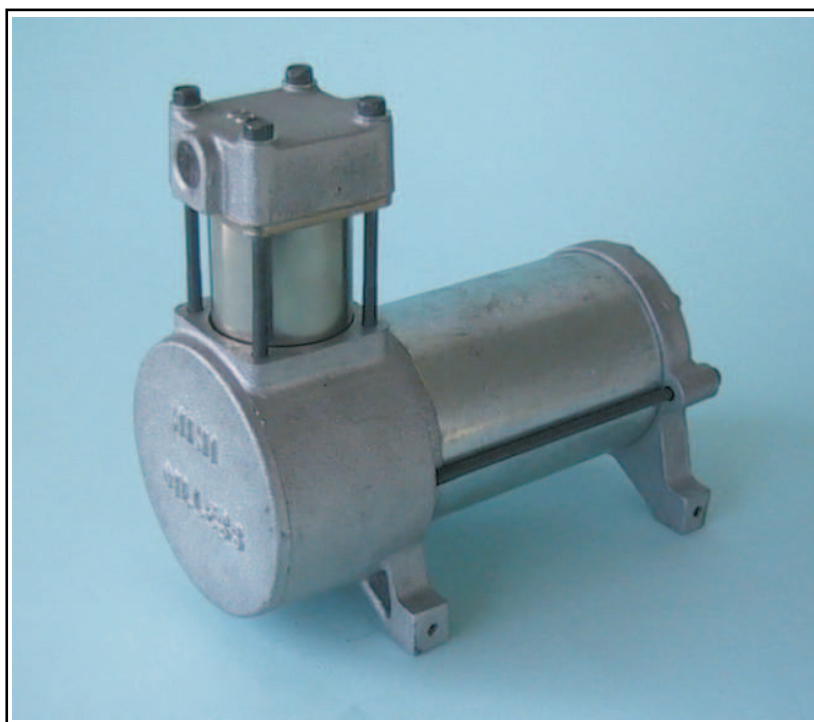

WERTHER INTERNATIONAL s.r.l.

Via F.Brunelleschi, 12

42040 CADE' (REGGIO EMILIA) - ITALY

Tel. 0522/9431 (r.a.) Telefax 0522/941997

WEB <http://www.wertherint.com> - E-mail sales@wertherint.com